
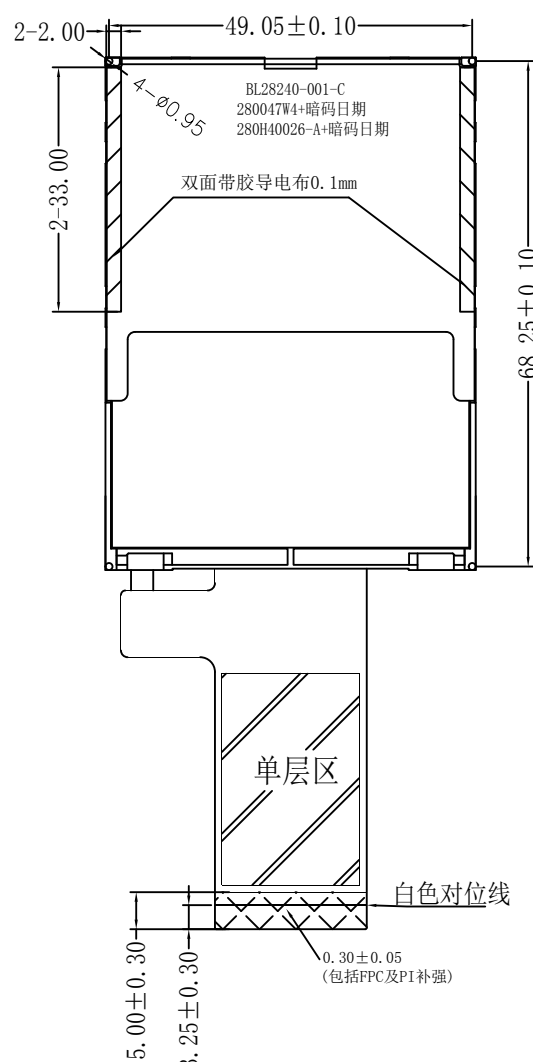


REV.	DRG DATE	DESCRIPTION	DRAWN BY
	2017-05-18	Firt issue	CYP

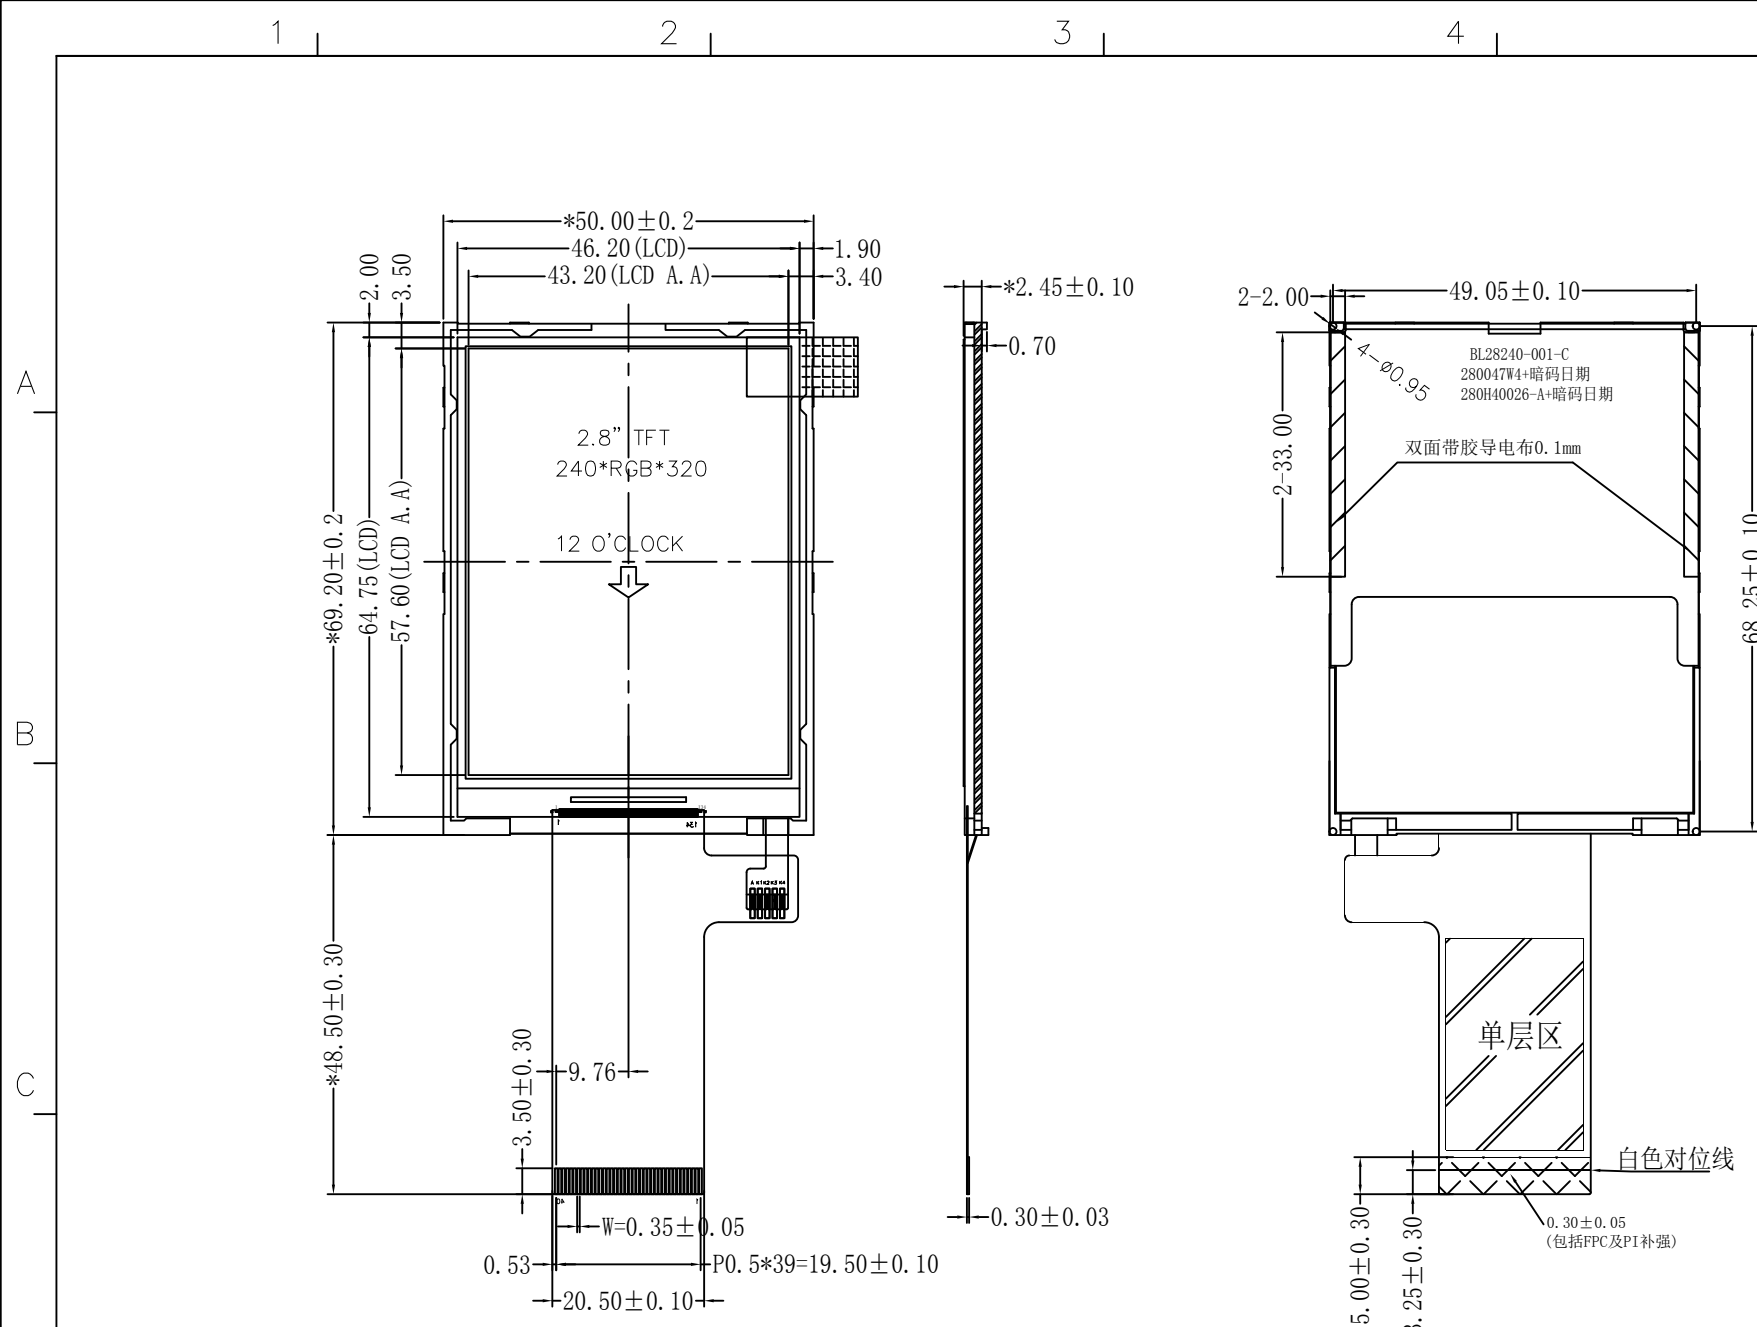


1	LED A
2	LED K1
3	LED K2
4	LED K3
5	LED K4
6	NC
7	NC
8	VCC
9	RESET
10	SPI_CS
11	SPI_SCK
12	SPI_SDA
13	IOVCC
14	GND
15	VS
16	HS
17	DE
18	PCLK
19	B0
20	B1
21	B2
22	B3
23	B4
24	B5
25	G0
26	G1
27	G2
28	G3
29	G4
30	G5
31	R0
32	R1
33	R2
34	R3
35	R4
36	R5
37	GND
38	NC
39	NC
40	NC

配置: HSD 2.8 (0.5T)+ST7789V
上砂0.22砂片 下光0.22光面

Specification:

- 1). Viewing angle: 12 0' clock
- 2). Display mode: 262K TFT/Transmissive/Normally White
- 3). Operating temp: -10° C~60° C
- 4). Storage temp: -20° C~70° C
- 5). LCD Driver IC:ST7789V
- 6). FPC MEET WITH CONNECTOR:
- 7). Backlight: 4 chip White LED (If=60mA, Vf=3.2V)
- 8). General Tolerance: ±0.2
- 9). MARK"*" IS THE IMPORTANT DIMENSION
- 10). ROHS Request

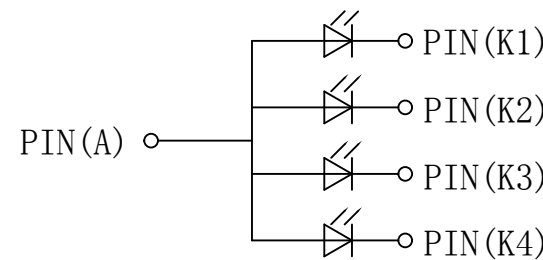

深圳市阿美林电子科技有限公司 Shenzhen Amelin Electronic Technology Co.,Ltd					DRG DATE	2017-05-18
TITLE.		REV.	UNIT	SIZE	DRAWING	CYP
MODEL.	AML280H40026-A		mm	A4	CHECK	
					APPROVE	

