
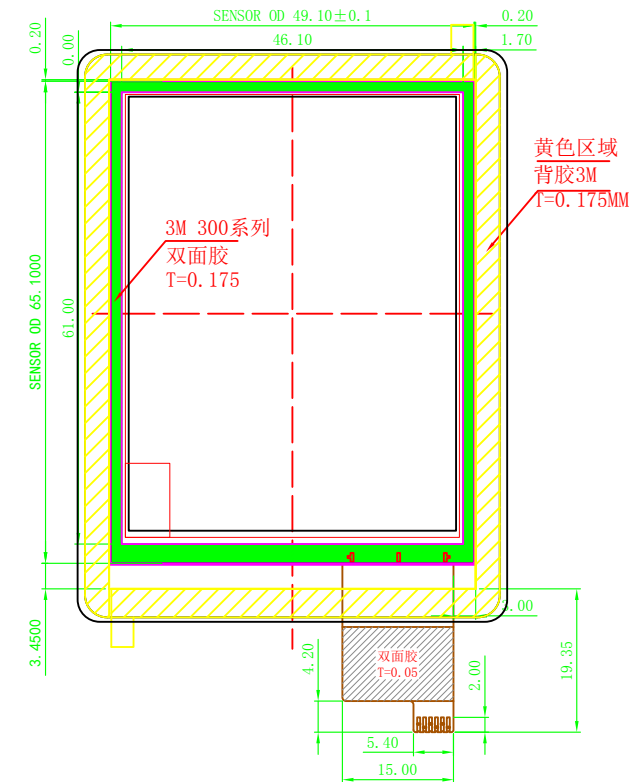
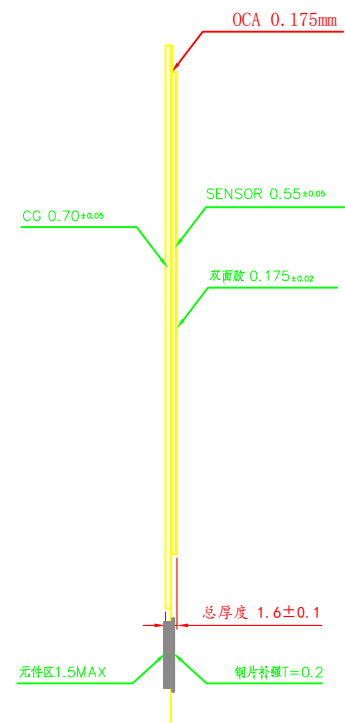


CUSTOMER NAME	CUSTOMER Ref. No.		No.	Revision Record	Reviser	Date
CUSTOMER'S APPROVAL		/ /	1.			
			2.			
			3.			
			4.			
			5.			

Front view

Side view

Back view

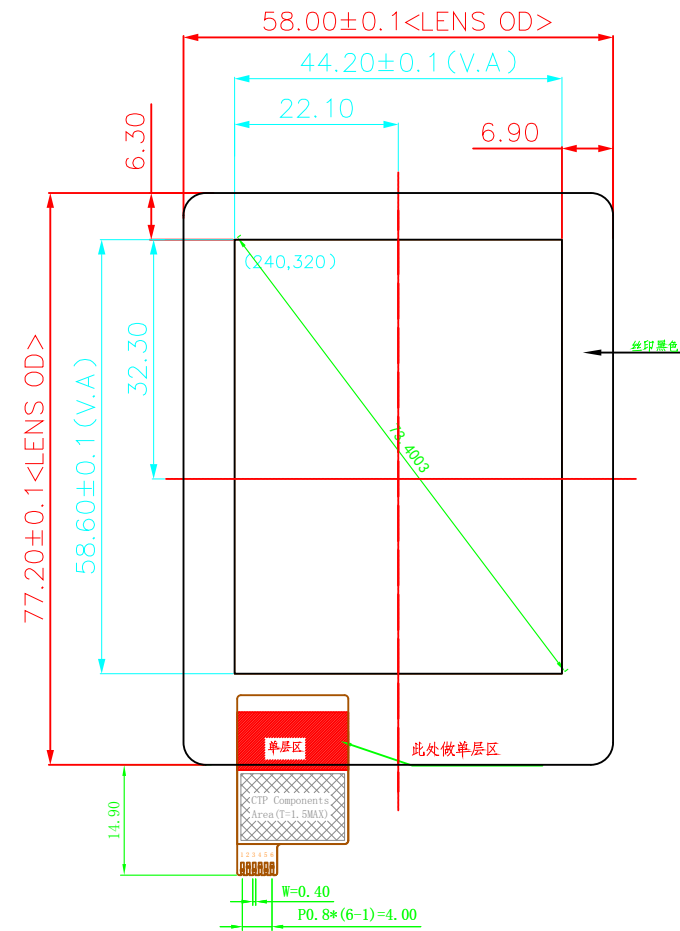

TECHNICAL PARAMETER :
 1.GLASS LENS+GLASS ITO+FPC
 ITO: 0.55mm
 GLASS LENS: 0.7mm
 LEAD : FPC
 IC: FT6236U

GLASS

OVERALL THICKNESST : T= 1.6MM (含双面胶厚度)

PIN	COMMENTS
1	TP_VDD
2	TP_/RES
3	TP_/IRQ
4	TP_SDA
5	TP_SCK
6	TP_GND

Elucidation	TP Engineering Drawing	Light Transparency	83% Min	Customer Number	深圳市阿美林电子科技有限公司			Pro (3)	
Type	G+G	Surface Hardness	6H	Production Number	AML028013GG-A0			Scale	1/1
IC	FT6236U	Operating Temp	-10° C~60° C, 20~90% RH	Drawing Ver	A1			Sheet	1/1
Drive Model	Mutual Capacitance	Storage Temp	-20° C~70° C 20~90% RH		Design	Checked	Approved	Unit	mm
Drive voltage	2.8~3.3 V	Connector	FPC	Name and Date	zeng	20171202		Tolerance	±0.2