

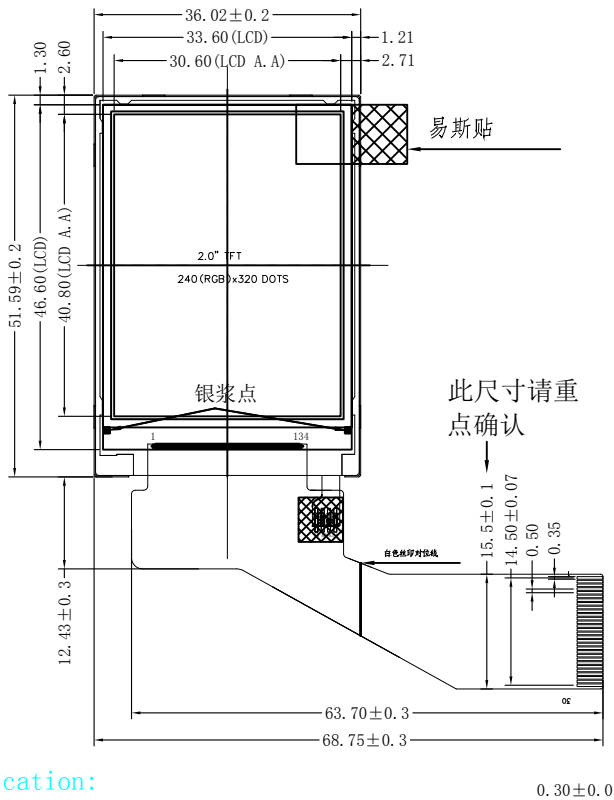
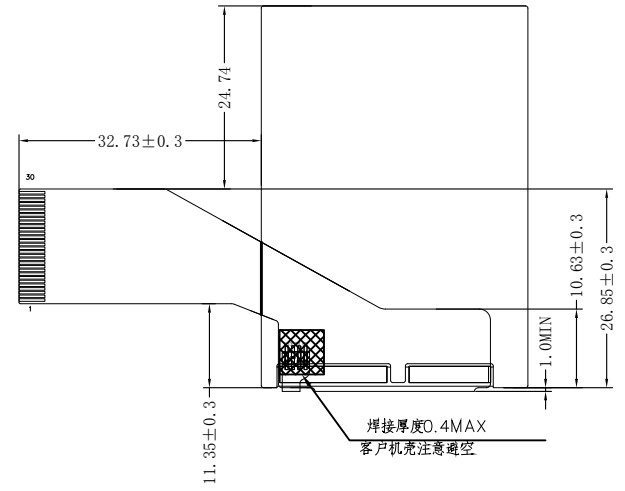


REV.	DRG DATE	DESCRIPTION	DRAWN BY
1.0	17-05-12	First version	Wang Jin


1	LEDK
2	LEDA
3	GND
4	OVCC1.8V
5	VCC2.8V
6	RESET
7	SCL
8	SDA
9	CS
10	HSYNC
11	VSYNC
12	DF
13	PCLK
14	RO
15	R1
16	R2
17	R3
18	R4
19	G0
20	G1
21	G2
22	G3
23	G4
24	G5
25	B0
26	B1
27	B2
28	B3
29	B4
30	GND

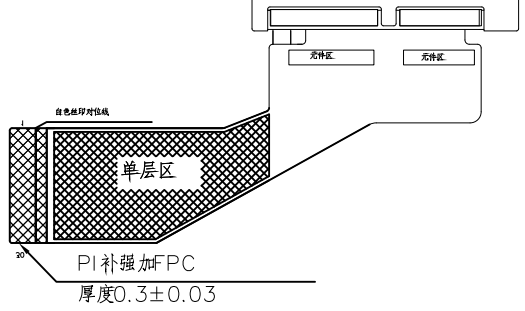

此尺寸请重点确认

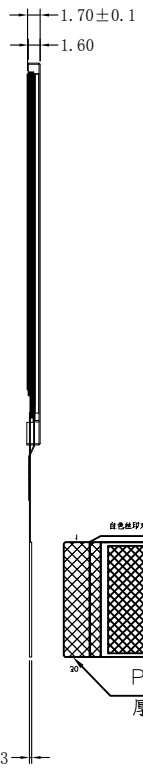

FPC弯折示意图
FPC展开出货



Specification:

- 1). Viewing angle: ALL
- 2). Display mode: 262K TFT/Transmissive/Normally Black
- 3). Operating temp: -20° C~+70° C
- 4). Storage temp: -30° C~+80° C
- 5). LCD Driver IC:ST7789V
- 6). Backlight:4 chip White LED
- 7). General Tolerance: ±0.2
- 8). ROHS Request

					DRG DATE	17-05-12
					DRAWING	Wang Jin
TITLE.	LCM OUTLINE	REV.	UNIT	SIZE	CHECK	
MODEL.	FRD200H30100-A	A	mm	A4	APPROVE	

