

深圳市阿美林电子科技有限公司 Shenzhen Amelin Electronic Technology Co. ,Ltd.	Doc.No.:	
	REV: A	PAGE: 1/14
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE: 2016-08-23	

Specifications

TFT-LCD module

Model No: FRD-CPT-7G-50PIN-103-3.5

For Customer's Acceptance	
Approved by	Comment

	Signature	Date
Prepared by		
Checked by		
Approved by		

Revision Record

Shenzhen Amelin Electronic Technology Co. Ltd.	Doc.No.:	
	REV: A	PAGE: 2/14
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE: 2016-08-23	

VEV NO.	REV DATE	CONTENTS	Note
A	2016-8-23	NEW ISSUE	

Shenzhen Amelin Electronic Technology Co. Ltd.	Doc.No.:	
	REV: A	PAGE: 3/14
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE: 2016-08-23	

Table Of Contents

List	Description	Page No.
	Cover	1
	Revision Record	2
	Table Of Contents	3
1	General Information	4
2	Absolute Maximum Ratings	4
3	Backlight Charasterics	4
4	External Dimensions	5
5	Interface Descrirtion	6
6	Reliability Test Conditions And Methods	7
7	Inspection Standard	8-9
8	Handling Precautions	10-11
9	Precaution For Use	11
10	Packing Method	11
11		--
12		--
13		--
14		--

Shenzhen Amelin Electronic Technology Co. Ltd.	Doc.No.:	
	REV: A	PAGE: 4/14
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE: 2016-08-23	

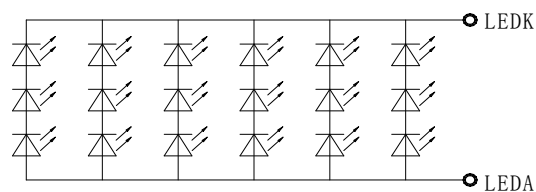
1. General Information

ITEM	STANDARD VALUES	UNITS
LCD type	7.0" TFT IPS	--
Dot arrangement	1024 × 3 (RGB) × 600	dots
Driver IC	天钰 9365A	--
Module size	163.9(W) × 102.9(H) × 3.5(T)	mm
Active area	154.21(W) × 85.92(H)	mm
Dot pitch	0.1506*0.1432	mm
Operating temperature	- 20 ~ + 70	°C
Storage temperature	- 30 ~ + 80	°C
Back Light	18 White LED In Parallel	--
Weight	TBD	g

2 .Absolute Maximum Ratings

ITEM	Symbol	MIN	MAX	UNITS
Power supply voltage 1	VCC	2.5	3.3	V
Power supply voltage 1	IOVCC	1.65	3.3	V
Operating temperature	Topr	-20	+70	°C
Storage temperature	Tstg	-30	+80	°C
Humidity	RH	---	90%(Max40 °C)	RH

3.Backlight Charaterics

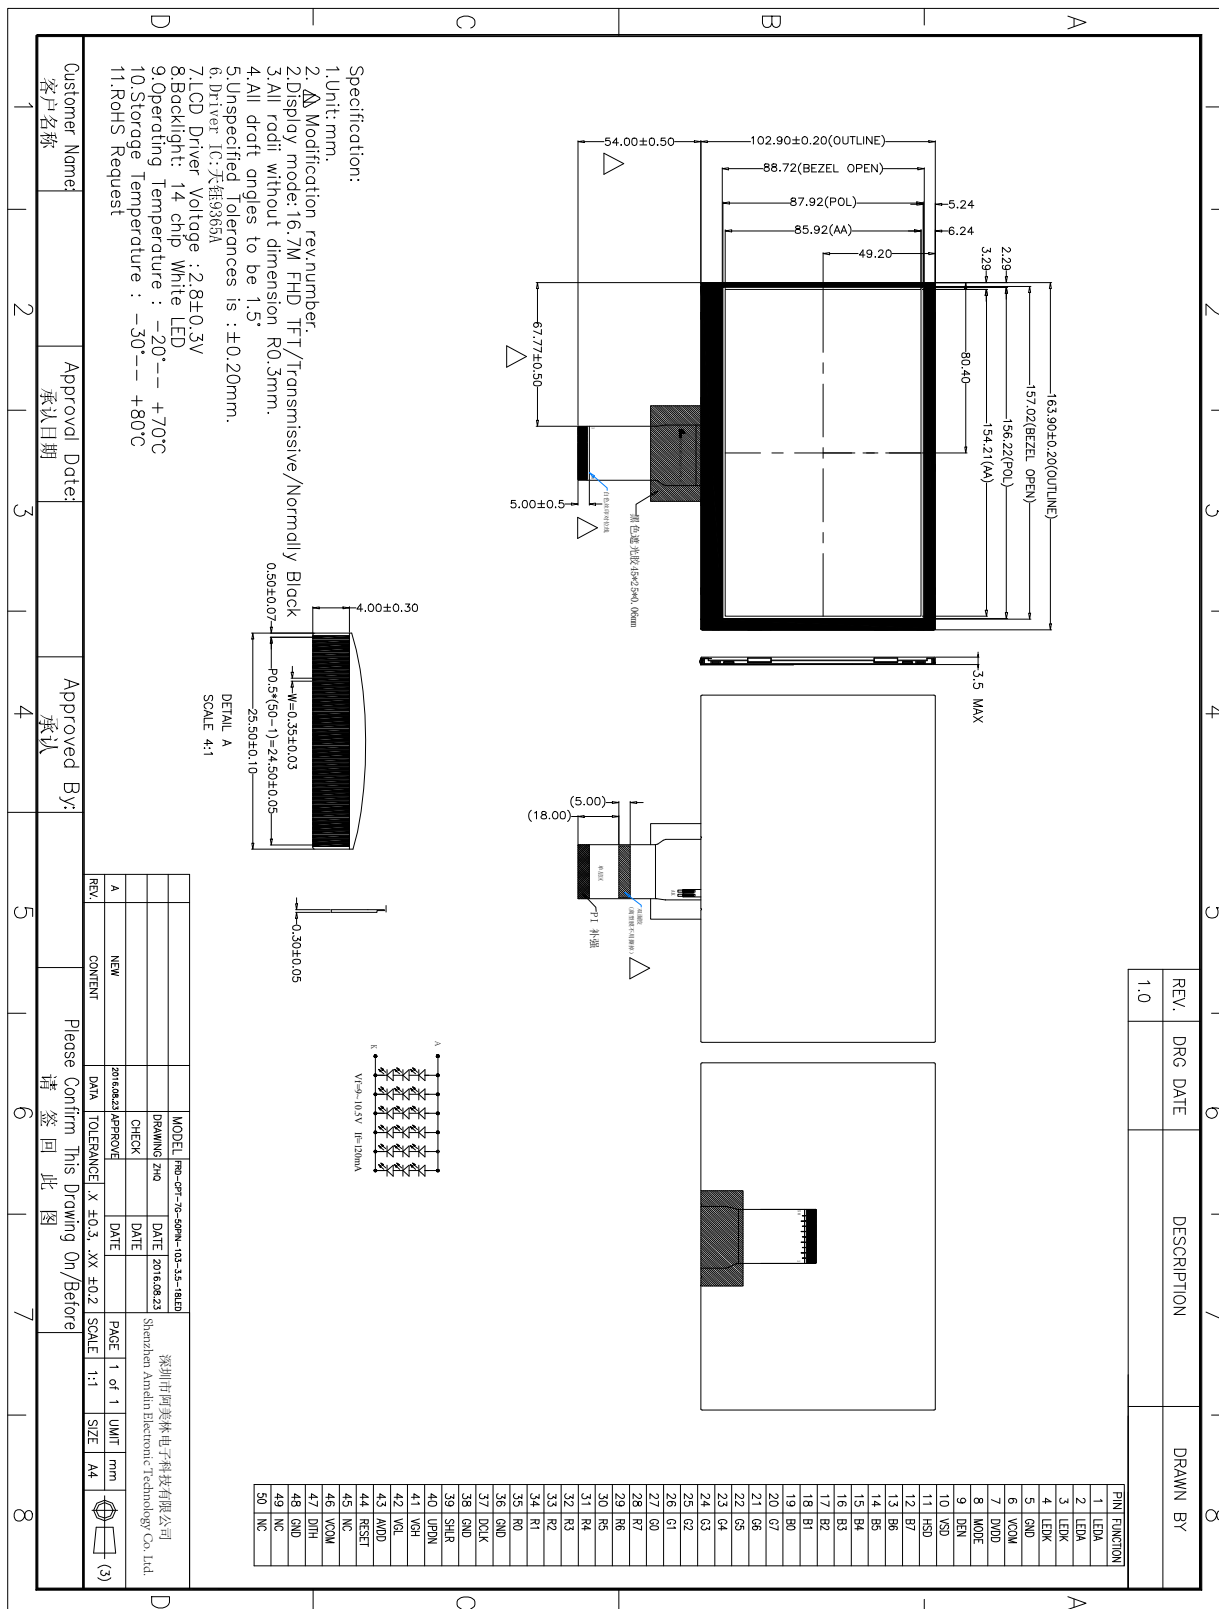


Circuit Diagram
IF=6*20MA, VF=9. 6V

Shenzhen Amelin Electronic Technology Co. Ltd.	Doc.No.:	
	REV: A	PAGE: 5/14
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE: 2016-08-23	

Item	Symbol	MIN	TYP	MAX	UNIT	Test Condition	Note
Supply Voltage	Vf	9.0	9.6	10.2	V	If=120 mA	-
Supply Current	If	-	120	-	mA	-	-
Reverse Voltage	Vr	-	-	5	V	10uA	
Power dissipation	Pd	-	72	-	mW	-	
Luminous Intensity f or LCM		-	300	-	mCd/m²	If=60 mA	
Uniformity for LCM	-	80	-	-	%	If=60 mA	
Life Time	-	50000	-	-	Hr	If=60 mA	-
Backlight Color	White						

4. External Dimensions



Shenzhen Amelin Electronic Technology Co. Ltd.	Doc.No.:	
	REV: A	PAGE: 7/14
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE: 2016-08-23	

5. Interface Description

PIN NO.	PIN NAME	DESCRIPTION
1	LEDA	LED Anode
2	LEDA	LED Anode
3	LEDK	LED Cathode
4	LEDK	LED Cathode
5	GND	System Ground
6	VCOM	Common Voltage
7	DVDD	Digital Power
8	MODE	DE/SYNC Mode Select. Normally Pull High H:DE mode. L:HSD/VSD mode
9	DEN	Data Enable signal
10	VSD	Vertical sync input. Negative polarity
11	HSD	Horizontal sync input. Negative polarity
12	B7	Blue Data Input(MSB)
13	B6	Blue Data Input
14	B5	Blue Data Input
15	B4	Blue Data Input
16	B3	Blue Data Input
17	B2	Blue Data Input
18	B1	Blue Data Input
19	B0	Blue Data input(LSB)
20	G7	Green Data Input(MSB)
21	G6	Green Data Input
22	G5	Green Data Input

Shenzhen Amelin Electronic Technology Co. Ltd.	Doc.No.:	
	REV: A	PAGE: 8/14
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE: 2016-08-23	

23	G4	Green Data Input
24	G3	Green Data Input
25	G2	Green Data Input
26	G1	Green Data Input
27	G0	Green Data Input(LSB)
28	R7	Red Data Input(MSB)
29	R6	Red Data Input
30	R5	Red Data Input
31	R4	Red Data Input
32	R3	Red Data Input
33	R2	Red Data Input
34	R1	Red Data Input
35	R0	Red Date Input(LSB)
36	GND	System Ground
37	DCLK	Clock Input
38	GND	System Ground
39	SHLR	Left or Right Display Control
40	UPDN	Up/Down Display Control
41	VGH	Positive Power for TFT
42	VGL	Negative Power for TFT
43	AVDD	Analog Power
44	RESET	Global reset pin. Active low to enter reset state. Suggest to connecting with an RC reset circuit for stability. Normally pull high. (R=10K Ω),C=1uF)
45	NC	Not Connect
46	VCOM	Common Voltage

Shenzhen Amelin Electronic Technology Co. Ltd.	Doc.No.:	
	REV: A	PAGE: 9/14
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE: 2016-08-23	

47	DITH	Dithering setting DITH="H"6bit resolution(last 2 bit of input data truncated) DITH="L"8bit resolution(default setting)
48	GND	System Ground
49	NC	Not Connect
50	NC	Not Connect

6. Reliability Test Conditions And Methods

NO	Item	Condition	Method
1	High / Low Temperature Storage	60°C/-20°C 500hrs	Check and record every 96Hrs
2	High / Low Temperature Life	50°C/-10°C 500hrs (operating mode)	Check and record every 96Hrs
3	High Temperature、High Humidity Operating	40°C 90% RH, 120Hrs	Check and record every 48hrs
4	Thermal Shock	-30°C(30Min) → 25°C(5Min) → 80°C(30Min) (conversion time, : 5 sec) 20 cycles	Each 10 cycles end , check
5	Vibration	10Hz~55Hz~10Hz Amplitude: 1.5mm 2hrs for each direction(X,Y,Z)	Each direction end, Check the Appearance and Electrical Characteristics
6	Static Electricity	Gap mood: ±1KV~±8KV (10 times air discharge with positive/negative voltage voltage gap : 1kv) Touch mood: ±1KV~±2KV	Each discharge end, Check the Electrical Characteristics



Shenzhen Amelin Electronic Technology Co. Ltd.	Doc.No.:	
	REV: A	PAGE: 10/14
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE: 2016-08-23	

7	Slump	Free faller movement for each side、 cording、 angle (75cm High、 6 sides、 2 angle、 2 cording)	End
---	-------	---	-----

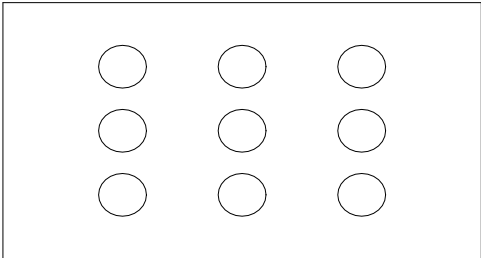
7.Inspection Standard

No	Item	Criterion	
01	Outline Dimension	In accord with drawing	
02	Position-fin ding Dimension Assemble Dimension	In accord with drawing	

Shenzhen Amelin Electronic Technology Co. Ltd.	Doc.No.:	
	REV: A	PAGE: 11/14
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE: 2016-08-23	

03	LCD black spots, white spots (Round type)	Round type: non display	Unit : mm															
		 <table border="1"> <thead> <tr> <th>Dimension</th> <th>Qualified Quantity</th> </tr> </thead> <tbody> <tr> <td>$D \leq 0.1$</td> <td>Ignore</td> </tr> <tr> <td>$0.1 < D \leq 0.15$</td> <td>3</td> </tr> <tr> <td>$0.15 < D \leq 0.25$</td> <td>2</td> </tr> <tr> <td>$D > 0.25$</td> <td>0</td> </tr> </tbody> </table>	Dimension	Qualified Quantity	$D \leq 0.1$	Ignore	$0.1 < D \leq 0.15$	3	$0.15 < D \leq 0.25$	2	$D > 0.25$	0						
Dimension	Qualified Quantity																	
$D \leq 0.1$	Ignore																	
$0.1 < D \leq 0.15$	3																	
$0.15 < D \leq 0.25$	2																	
$D > 0.25$	0																	
04	LCD black spots, white spots (Line Style)	Unit : mm	Unit : mm															
		 <table border="1"> <thead> <tr> <th>Length</th> <th>Width</th> <th>Qualified Quantity</th> </tr> </thead> <tbody> <tr> <td>-</td> <td>≤ 0.02</td> <td>Ignore</td> </tr> <tr> <td>≤ 3</td> <td rowspan="2">$0.02 < W \leq 0.03$</td> <td>2</td> </tr> <tr> <td>≤ 2</td> <td>$0.03 < W \leq 0.05$</td> <td>1</td> </tr> <tr> <td>-</td> <td>$D > 0.05$</td> <td>According to circle</td> </tr> </tbody> </table>	Length	Width	Qualified Quantity	-	≤ 0.02	Ignore	≤ 3	$0.02 < W \leq 0.03$	2	≤ 2	$0.03 < W \leq 0.05$	1	-	$D > 0.05$	According to circle	
Length	Width	Qualified Quantity																
-	≤ 0.02	Ignore																
≤ 3	$0.02 < W \leq 0.03$	2																
≤ 2		$0.03 < W \leq 0.05$	1															
-	$D > 0.05$	According to circle																
05	LCD Scratch 、 Threadlike Fiber	Same to NO.3 circle sightline and surface of LCD is vertical (2)Same to NO.3 line style																
06	POL	It is not admissible that POL is beyond the edge of glass, else, unqualified. It is essential that POL is over the 50 percent of width of frame , else ,unqualified. According to the drawing in case of special definition.																

Shenzhen Amelin Electronic Technology Co. Ltd.	Doc.No.:	
	REV: A	PAGE: 12/14
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE: 2016-08-23	

07	Brightness	In accord with product specification	Drive condition is according to specification Measure location is in Follow Picture 3、 Adjust brightness instrument to zero , burrow against the surface of LCD , press “measure” , record when the display is steady. (YOKOGAWA-3298)	
			 <p style="text-align: center;">Measure location</p>	
08	CR (Max)	According to specification	According to product specification Measure instrument (DMS-501)	
09	Response time	According to specification	According to product specification Measure instrument (DMS-501)	
10	Viewing angle	According to specification	According to product specification Measure instrument (DMS-501)	
11	Vibration、 Ring	Compare with the sample customer supply	Compare with the sample customer supply when assemble	

Shenzhen Amelin Electronic Technology Co. Ltd.	Doc.No.:	
	REV: A	PAGE: 13/14
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE: 2016-08-23	

8 . Handling Precautions

8.1 Mounting method

The LCD panel of SC LCD LCD module consists of two thin glass plates with polarizes which easily be damaged. And since the module in so constructed as to be fixed by utilizing fitting holes in the printed circuit board.

Extreme care should be needed when handling the LCD modules.

8.2 Caution of LCD handling and cleaning

When cleaning the display surface, Use soft cloth with solvent [recommended below] and wipe lightly

- Isopropyl alcohol
- Ethyl alcohol

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface.

Do not use the following solvent:

- Water
- Aromatics

Do not wipe ITO pad area with the dry or hard materials that will damage the ITO patterns

Do not use the following solvent on the pad or prevent it from being contaminated:

- Soldering flux
- Chlorine (Cl) , Salfur (S)

If goods were sent without being sili8con coated on the pad, ITO patterns could be damaged due to the corrosion as time goes on.

If ITO corrosion happen by miss-handling or using some materials such as Chlorine (Cl), Salfur (S) from customer, Responsibility is on customer.

8.3 Caution against static charge

The LCD module use C-MOS LSI drivers, so we recommended that you:

Connect any unused input terminal to Vdd or Vss, do not input any signals before power is turned on, and ground your body, work/assembly areas, assembly equipment to protect against static electricity.

8.4 packing

- Module employ LCD elements and must be treated as such.
- Avoid intense shock and falls from a height.
- To prevent modules from degradation, do not operate or store them exposed direct to sunshine or high temperature/humidity

8.5 Caution for operation

- It is an indispensable condition to drive LCD's within the specified voltage limit since the higher voltage then the limit cause the shorter LCD life.
- An electrochemical reaction due to direct current causes LCD's undesirable deterioration, so that the use of direct current drive should be avoided.
- Response time will be extremely delayed at lower temperature then the operating temperature range and on the other hand at higher temperature LCD's how dark color in them. However those phenomena do not mean malfunction or out of order with LCD's, which will come back in the specified operation temperature.

Shenzhen Amelin Electronic Technology Co. Ltd.	Doc.No.:	
	REV: A	PAGE: 14/14
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE: 2016-08-23	

- If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit.
Usage under the maximum operating temperature, 50%Rh or less is required.

8.6 storage

In the case of storing for a long period of time for instance, for years for the purpose or replacement use, the following ways are recommended.

- Storage in a polyethylene bag with the opening sealed so as not to enter fresh air outside in it . And with no desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light's keeping the storage temperature range.
- Storing with no touch on polarizer surface by the anything else.
[It is recommended to store them as they have been contained in the inner container at the time of delivery from us

8.7 Safety

- It is recommendable to crash damaged or unnecessary LCD's into pieces and wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.
- When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water

9. Precaution For Use

9.1

A limit sample should be provided by the both parties on an occasion when the both parties agreed its necessity. Judgment by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.

9.2

On the following occasions, the handing of problem should be decided through discussion and agreement between responsible of the both parties.

- When a question is arisen in this specification
- When a new problem is arisen which is not specified in this specifications
- When an inspection specifications change or operating condition change in customer is reported to SC LCD , and some problem is arisen in this specification due to the change
- When a new problem is arisen at the customer's operating set for sample evaluation in the customer site.

10 Packing Method

To Be Determined